


PLAN

PRUNING:  
REMOVE ANY BROKEN  
BRANCHES.

NOTE:  
NO MULCH  
WITHIN 4" OF  
TRUNK, TYP.

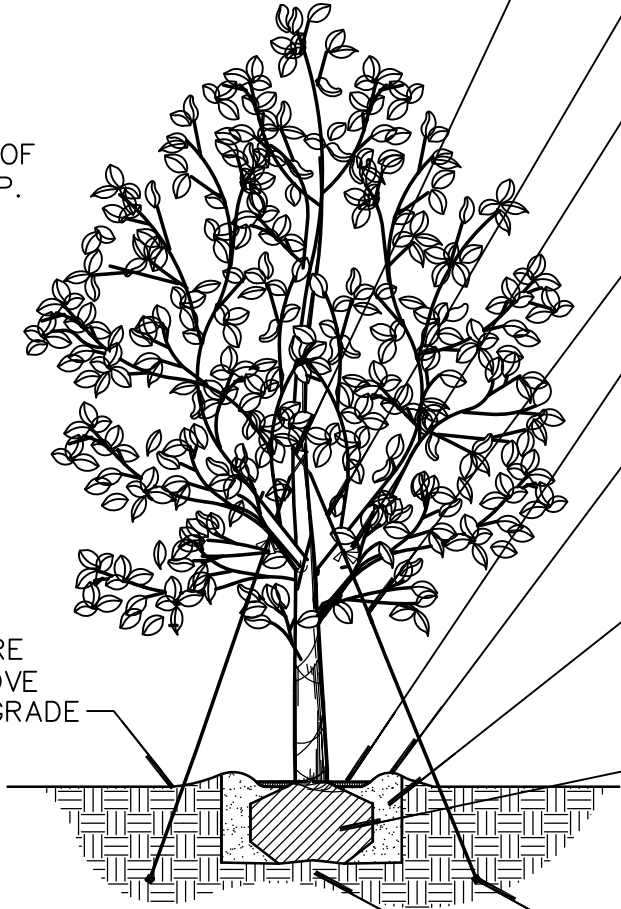

SECTION

(OVER 5" TO 10" CALIPER)

PROTECT TREE TRUNK WITH 1/2" REINFORCED RUBBER HOSE. ATTACHMENT POINT OF CABLE SHOULD BE 50-65% UP THE TRUNK AND ABOVE A MAJOR BRANCH.

3/8TH INCH BRAIDED GALVANIZED STEEL CABLE.

WHITE PLASTIC SHIELDS ON GUY WIRES BELOW TURNBUCKLES, TYP.

TURNBUCKLE

1"-2" DEPTH MULCH ON ROOT BALL.

4" WATER RING - (WITHIN ROOT BALL DIA.), FILL 3 TIMES IMMEDIATELY AFTER PLANTING. RAKE OUT PRIOR TO MULCHING AND PLANTING.

BACKFILL: TOP SOIL TYPICAL OF AREA. (BACKFILL SHALL BE AMENDED THROUGHOUT ENTIRE SITE W/ FERTILIZER AND COMPOST AS REQUIRED).

ROOTBALL: LOOSEN AND REMOVE BURLAP AND WIRE FROM TOP OF ROOT BALL TO 1/2 OF DEPTH. REMOVE ALL BURLAP IF NOT 100% BIODEGRADABLE.

36" OR 48" EARTH ANCHOR W/ 8" FLIGHT; OR DUCKBILL NO. 88DTS.

COMPACT SOIL IMMEDIATELY BENEATH THE ROOT BALL TO PREVENT SETTLING.